


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor PT-WPF-3CPB Series is a optic adjustable mounted luminaire designed to meet your needs. Easily illuminate the right amount of area while providing narrow to wide area coverage with optimal lighting; while maintaining a robust, durable housing. The WPF Series is available in two power selectable sizes with wattages ranging from 60W to 100W and integrates CCT selectable technology with 30K, 40K, and 50K options.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.

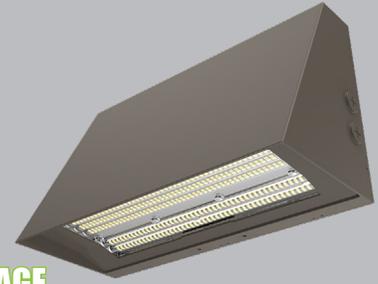

CONSTRUCTION

The die-cast aluminum is a durable, powder-coated housing sealed by a silicone ring which enables the luminaire to achieve dust and weather resistance. The fixture has been constructed and complies with wet location ratings, IP65.

OPTICS

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics. Adjustable (Narrow, Medium & Wide)

ELECTRICAL

Luminaire is built with the highest quality 0-10V dimmable LED driver that operates with Standard Voltage (120V-277V) and is completed with 4KV surge protection.

LISTING

ETL, FCC , IP65 rating

LIFESPAN


5 year Limited Warranty, L70 50,000 hours.

TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
DISTRIBUTION	Narrow, Medium, Wide
CRI	80
DIMMING	0-10V dimming
VOLTAGE	100V-277V
POWER FREQUENCY	50/60 Hz
CURRENT	0.9 - 0.33A
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited (Standard)



DIMENSION

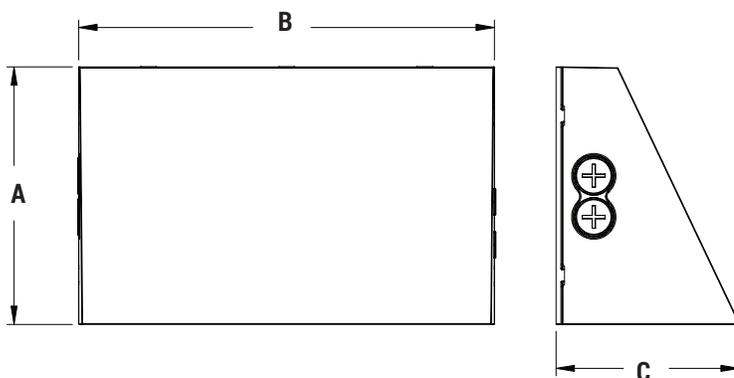

CATALOG NO.	PT-WPF-60-3CPB	PT-WPF-100-3CPB
A	8.26"	8.26"
B	13.34"	13.34"
C	5.86"	5.86"
Net Weight	5.5 lbs	5.5 lbs
Gross Weight	7 lbs	7 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-WPF-60-3CPB-

PT-WPF	-		-	3CPB	-		-		-	
Fixture				Controls/Sensors (Sold separately)						
Series	Max Wattage	CCT/Wattage	Finish	TEELIO ¹	Analog Sensors		Remote			
PT-WPF	60	3CPB (40W/50W/60W) (30K/40K/50K)	__ Blank (Bronze) CUSTOM COLOR Powder Coating (Inquire for Details)	__ Blank  PT-BTN Bluetooth Node	__ Blank  MS-WP3 Motion Sensor	__ Blank  MSS-RC-100 Remote Control				
	100	3CPB (60W/80W/100W) (30K/40K/50K)		 PT-BTC-6 6A Bluetooth Power Pack						

	-		-	
Add-On ³		Fixture Add-on ³		Other Option
EM Battery		Transformer ²		Warranty
__ Blank  PT-EMN-15W-155 15W Low Output EM Battery Pack (Internal installation)		__ Blank  PT-SDT-325 325 VA Step down Transformer (Remote installation)		__ Blank (5 Year Standard) 7YR 7 Year Limited Warranty 10YR 10 Year Limited Warranty

¹ DOWNLOAD THE TEELIO APP



² TRANSFORMER

PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.

³ SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPF-60-3CPB	40W	3000K	5324	133	S-DBH1FR
		4000K	5502	137	
		5000K	5785	144	
	50W	3000K	6495	130	
		4000K	6727	134	
		5000K	6748	135	
	60W	3000K	7963	133	
		4000K	8186	136	
		5000K	8320	138	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPF-100-3CPB	60W	3000K	8157	136	S-RPD1HR
		4000K	8540	142	
		5000K	8596	143	
	80W	3000K	10581	132	
		4000K	11136	139	
		5000K	11064	138	
	100W	3000K	12608	126	
		4000K	13299	133	
		5000K	13246	132	



QTY/CARTON

1
PIECES

WHAT'S IN THE BOX?

- Fixture
- Installation sheet

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

HIGHLIGHT FEATURES

