

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor PT-WPH-3CPB Series is a optic adjustable mounted luminaire designed to meet your needs. Easily illuminate the right amount of area while providing narrow to wide area coverage with optimal lighting; while maintaining a robust, durable housing. The WPH Series is available in two power selectable sizes with wattages ranging from 60W to 120W and integrates CCT selectable technology with 30K, 40K, and 50K options.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls.



CONSTRUCTION

The die-cast aluminum is a durable, powder-coated housing sealed by a silicone ring which enables the luminaire to achieve dust and weather resistance. The fixture has been constructed and complies with wet location ratings, IP65.

OPTICS

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics. Adjustable (Narrow, Medium & Wide)

ELECTRICAL

Luminaire is built with the highest quality 0-10V dimmable LED driver that operates with Standard Voltage (120V-277V) and is completed with 4KV surge protection.

LISTING

ETL, FCC , IP65 rating

LIFESPAN


5 year Limited Warranty, L70 50,000 hours.

TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
DISTRIBUTION	Narrow, Medium, Wide
CRI	80
DIMMING	0-10V dimming
VOLTAGE	100V-277V
POWER FREQUENCY	50/60 Hz
CURRENT	0.9 - 0.33A
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 113°F
EM WORKING TEMPERATURE	-32°F ~ 122°F
IP RATING	IP65 Wet Location
WARRANTY	5 year limited (Standard)



DIMENSION

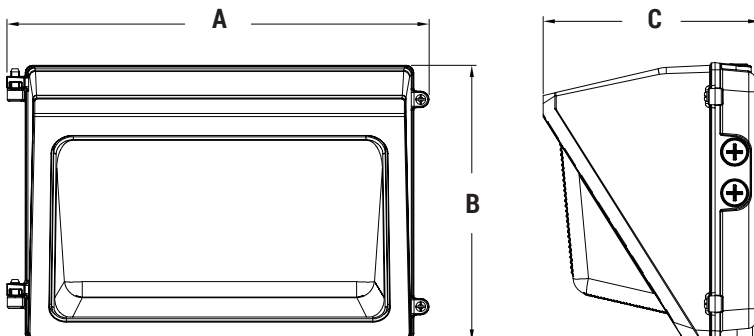

CATALOG NO.	PT-WPH-60-3CPB	PT-WPH-120-3CPB
A	12.21"	12.21"
B	9.29"	9.29"
C	7.28"	7.28"
Net Weight	8 lbs	8 lbs
Gross Weight	9.5 lbs	9.5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: PT-WPH-60-3CPB-

PT-WPH - [] - 3CPB - [] - [] - []			
Fixture			
Series	Max Wattage	CCT/Wattage	Finish
PT-WPH	60	3CPB (40W/50W/60W) (30K/40K/50K)	__ Blank (Bronze) CUSTOM COLOR Powder Coating (Inquire for Details)
	120	3CPB (80W/100W/120W) (30K/40K/50K)	
Controls/Sensors (Sold separately)			
TEELIO ¹	Analog Sensors	Remote	
__ Blank  PT-BTN Bluetooth Node  PT-BTC-6 6A Bluetooth Power Pack	__ Blank  MS-WP3 Motion Sensor	__ Blank  MSS-RC-100 Remote Control	

[] - [] - []		
Add-On ³		
EM Battery		
__ Blank  PT-EMN-15W-155 15W Low Output EM Battery Pack (Internal installation)		
Fixture Add-on ³		Other Option
Transformer ²		Warranty
__ Blank  PT-SDT-325 325 VA Step down Transformer (Remote installation)		__ Blank (5 Year Standard) 7YR 7 Year Limited Warranty 10YR 10 Year Limited Warranty

¹DOWNLOAD THE TEELIO APP



²TRANSFORMER

PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.

³SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPH-60-3CPB	40W	3000K	6241	156	S-JXNQX
		4000K	6544	163	
		5000K	6547	163	
	50W	3000K	7391	147	
		4000K	7771	155	
		5000K	7723	154	
	60W	3000K	8705	145	
		4000K	9179	152	
		5000K	9076	151	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPH-120-3CPB	80W	3000K	11948	149	S-R7CM0M
		4000K	12647	158	
		5000K	12522	156	
	100W	3000K	14115	141	
		4000K	15053	150	
		5000K	14788	147	
	120W	3000K	16732	139	
		4000K	18190	151	
		5000K	18162	151	



WHAT'S IN THE BOX?

- Fixture
- Installation sheet

QTY/CARTON

1
PIECES

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

• OPTIC ADJUSTABLE



Choose your desired wattage and color temperature by the DIP switches

