

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

Portor PT-WPS Series is a semi-cut-off wall mounted luminaire designed in a slim profile to seamlessly blend into the environment while providing clean lines, a stylish finish, and optimal lighting; while maintaining a robust, durable housing. The WPS Series is available in two power selectable sizes with wattages ranging from 60W to 100W and integrates CCT selectable technology with 30K, 40K, and 50K options.

Ideal use for warehouses, walkways, building entry ways, parking lots, retail exteriors and shopping malls

**WITH INTEGRATED PHOTOCELL**



### CONSTRUCTION

The die-cast aluminum is a durable, powder-coated housing sealed by a silicone ring which enables the luminaire to achieve dust and weather resistance. The fixture has been constructed and complies with UL wet location ratings, IP65.

### OPTICS

Borosilicate glass lens designed to reduce glare and improve over-all light distribution through precision formed LED optics.

### ELECTRICAL

Luminaire is built with the highest quality 0-10V dimmable LED driver that operates with Universal Voltage (120V-277V) and is completed with 4KV surge protection.

### MOUNTING

Quick setup with just a screwdriver and drill. Mount the base, connect L/N/G wires, seal with the EVA pad, and secure the cover. Simple, fast, and no extra tools needed.

### CONTROLS

Options available for occupancy sensors with daylight harvesting function.

### LISTING

UL Listed. DLC Premium Listed.

### LIFESPAN


L70 Rated for 100,000 hours

### TECHNICAL SPECIFICATION

CCT	3000K/4000K/5000K
CRI	80
DIMMING	0-10V dimming
VOLTAGE	120V - 277V
POWER FREQUENCY	50/60 Hz
CURRENT	0.51A
POWER FACTOR	>0.9
THD	≤20%
WORKING TEMPERATURE	-40°F ~ 45°F
IP RATING	IP65, Suitable for Wet locations
WARRANTY	5 year limited (Standard)





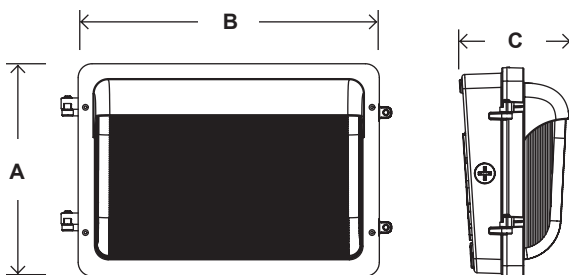

### DIMENSION




CATALOG NO.	PT-WPS-60-3CP	PT-WPS-100-3CP
A	8.9"	8.9"
B	13.8"	13.8"
C	4.5"	4.5"
Net Weight	2.5 lbs	4.5 lbs
Gross Weight	3 lbs	5 lbs

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

ORDERING SAMPLE: **PT-WPS-60-3CP-PT-BTN-PT-EMA-8W**

PT-WPS			3CP		
Fixture			Sensors <sup>3</sup>		
Series	Size	CCT/Wattage	Analog Sensors		
PT-WPS	60 (UP TO 60W)	3CP (3000K/4000K/5000K) (40W/50W/60W)	__ Blank   <b>MS-WP3</b> Microwave Motion Sensor (100V-277V)		
	100 (UP TO 100W)	3CP (3000K/4000K/5000K) (80W/90W/100W)	 <b>MSS-RC-100</b> Remote Control		
			Add-On <sup>3</sup>		
			EM Battery		
			__ Blank   <b>PT-EMA-8W (60W)</b> 8W AC Emergency Battery Pack (Internal or Remote installation)		
			 <b>PT-EMA-25W (100W)</b> 25W AC Emergency Battery Pack (Remote installation)		

Mounting	Photocell	Fixture Add-on <sup>3</sup>	Other Option <sup>3</sup>
Wall Mount	Integrated Photocell	Transformer <sup>1</sup>	Warranty
__ Blank	__ Blank	__ Blank   <b>PT-SDT-325</b> 325 VA Step down Transformer (Remote installation)	__ Blank (5 Year standard)  <b>7YR</b> 7-year Limited Warranty  <b>10YR</b> 10-year Limited Warranty

### <sup>1</sup> TRANSFORMER


PT-SDT-325 is a step-down auto-transformer designed to convert high voltage, low current power into low voltage, high current power. It has a maximum power rating of 325VA, which makes it suitable for use in a variety of applications, such as electrical power transmission, distribution, and electronic devices. Remote installation.


### <sup>3</sup> SOLD SEPARATELY

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

### LUMEN PACKAGES

(Delivered lumens are based on the actual IES results)

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPS-60-3CP	40W	3000K	5,514	138	S-87FX96
		4000K	5,631	141	
		5000K	5,652	141	
	50W	3000K	6,738	135	
		4000K	6,894	138	
		5000K	6,797	136	
	60W	3000K	7,799	130	
		4000K	8,178	136	
		5000K	7,844	131	

CATALOG NUMBER	WATTAGE	CCT	DELIVERED LUMENS	EFFICACY (LM/W)	DLC ID
 PT-WPS-100-3CP	80W	3000K	11,231	140	S-D7TWK1
		4000K	11,498	144	
		5000K	11,175	140	
	90W	3000K	12,584	140	
		4000K	12,873	143	
		5000K	12,613	140	
	100W	3000K	13,790	138	
		4000K	13,979	140	
		5000K	13,449	134	



### WHAT'S IN THE BOX?

- Fixture
- Installation sheet

### QTY/CARTON

**1**  
PIECES