

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

**DESCRIPTION**

Why stock three different color temperatures when you can have 3-in-1? Portor's retrofit residential downlights are taking the market by storm! Available in 5"/6" reflector smooth finish and featuring color tunable technology that lets the user choose between 3000K, 4000K, or 5000K.

Ideal use for residential housings, high-rise condominiums, the healthcare industry, universities/campuses, shopping centers and hospitality.



**TUNABLE 3-1 CCT SELECTOR**



Easily flip the switch for desired CCT. It's that simple!

**CONSTRUCTION**

PC driver housing and aluminum reflector with architectural white finish. Standard industry torsion springs adjust to fit 5" and 6" compatible housings. Standard gasket included to ensure proper seal E26/GU24 base.

**ELECTRICAL**

Luminaire is built with the highest quality 120V drivers, ensuring energy efficiency.

**ENERGY SAVINGS**

80% more energy savings than halogen lamps. Low heat production requires less air-conditioning requirements, further increasing energy cost savings.

**DIMMING**

Triac dimmable down to 5%. Compatible with most major brands of dimmers.

**LISTING**

ETL Listed, FCC, RoHS, CE & Energy Star Listed

**TECHNICAL SPECIFICATION**

WATTAGE	12W
LUMENS	1040 lumens
EFFICACY	87 lm/W
VOLTAGE	AC120V
POWER FREQUENCY	50/60 Hz
CCT	<b>3000K</b> 4000K 5000K
CRI	Ra>90
IP RATING	IP40, Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited




MODEL NUMBER(S)						
MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLR-6I-12W-3CCT-S	12W	1040 (1040 lumens at 4000K)	87	3000K/4000K/5000K	>90	120V


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------



Easily flip the switch for desired CCT.

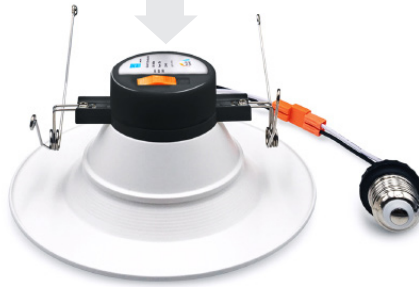

**DIMENSION**

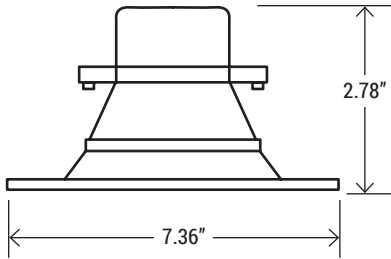

- Fits most 5" & 6" recessed housings
- Sealing gasket standard

**ACCESSORY**



E26 Adapter included for easy retrofitting

**COMPATIBLE DIMMERS**

LUTRON	LEVITON
<ul style="list-style-type: none"> <li>• CT-600PR</li> <li>• MSCL-0P153MH</li> <li>• DVWCL-153PH</li> <li>• TGCL-153PR</li> <li>• MA-RR</li> <li>• DVCL-153PR</li> <li>• SCL-153PR</li> <li>• P-PKG1W-WH-R</li> <li>• MACL-153MH</li> </ul>	<ul style="list-style-type: none"> <li>• R00-RNL06-TW</li> <li>• R50-IPL06-10M</li> </ul>

**PHOTOMETRY**

Fixture photometry has been conducted accredited testing laboratory in accordance with IESNA LM79-08.

