



PT-DLSM2-R Series

Round LED Surface Mount Downlight with 5CCT

Project Name: Notes: Date: Type:

Portor's surface mounted downights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM Series features color tunable technology that lets the user choose between 2700K, 3000K, 3500K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



TUNABLE 5-1 CCT SELECTOR



FEATURES

- · Edge-lit technology, with no glare or dark spots
- Instant-on
- Slim design
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- · Damp location rated
- Easy to install on standard J-box

DIMMING

Triac dimmable down to 100%-10%. Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

Energy STAR









TECHNICAL SPECIFICATION

10W / 15W / 18W
680 / 1095 / 1398
up to 77 lm/W
120V, 60 Hz
2700K / 3000K / 3500K / 4000K / 5000K
90
120°
Suitable for damp locations
Triac dimming
>0.9
5 year limited

MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLSM2-R-5I-10W-5CCT	10W	680*	68	2700K/3000K/3500K/ 4000K/5000K	90	120V
PT-DLSM2-R-7I-15W-5CCT	15W	1095*	73			
PT-DLSM2-R-9I-18W-5CCT	18W	1398*	77			

(*Based on the Energy Star LED Luminaires Test Result @ 4000K)








PT-DLSM2-R Series

Round LED Surface Mount Downlight with 5CCT

Project Name: Notes: Date: Type:

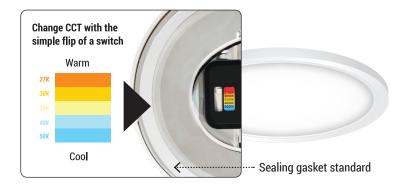


AVAILABLE TRIM OPTIONS (Sold separately)



TRIMS ARE ONLY AVAILABLE ON THE 5", 7", AND 9" MODEL

DIMENSION

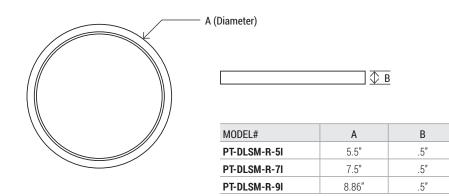

RECOMMENDED DIMMER

LUTRON
• PD-6WCL
• DVCL-153P
• CTCL-153P
• MACL-153M
• TGCL-153P
• LGCL-153P
LEVITON
• 6681
• 6672

MOUNTING OPTION

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.



3-1/2" octagon/steel box



4" octagon/steel box



3-1/2" round/plastic box



4" round/plastic box



4" round/plastic box with bar hanger assembly

(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)