


Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

The PT-EXL-C SALIDA Series is the category leader in emergency lighting featuring adjustable, dual head lights, 90-minute power outage uptime, backlit red chevrons (single or double), and a polycarbonate housing that is universally mountable. The PT-EXL-C SALIDA adheres to the majority of state and local codes for indoor exit and emergency lighting solutions.

Ideal use for commercial buildings, industrial facilities, entryways, stairways, and hallways.



Simply flip the switch for Bi-Color **RED** or **Green** LED's

**CONSTRUCTION**

Market standard mold consisting of thermoplastic ABS housing with UL 94V-0 flame rating. Field adjustable for single or dual face in red or green color inserts. Internal switch for selection of bi-color red/green LEDs. 2 x 12pcs ultra bright 2835 SMT LED lamp heads for emergency mode.

**ELECTRICAL**

Dual voltage operation with 120V/277VAC and input watt of 3.5W. Includes built-in 9.6V1000mAh nickel cadmium battery with a 90-minute runtime and 24 hour charge time.

**MOUNTING**

The universal J-Box mounting pattern supports quick installation time. Mount directly on a wall or ceiling.

**ENERGY SAVINGS**

LED emergency lights may reduce energy consumption up to 85% and lower overall maintenance costs.

**LISTING**

RoHS


**WARRANTY**

5 year limited warranty on electrical parts and housing. 3 year limited warranty on battery.

**TECHNICAL SPECIFICATION**

INPUT WATT	3.5W
LUMENS	207 lm
VOLTAGE	Dual Voltage 120V-277V
BATTERY TYPE	9.6V600mAh Nickel Cadmium
EM RUN TIME	90 mins
CHARGING TIME	24 hrs
WORKING TEMPERATURE	32°F ~ 104°F
IP RATING	Indoor Damp Location

**DIMENSION**

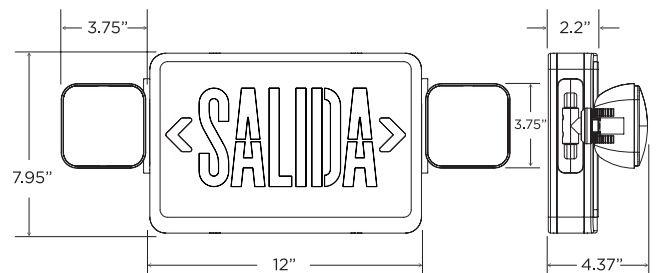

**ORDERING SAMPLE: PT-EXL-C-S-SAL**

Series	Style/Shape	FACE	Finish	Mounting
<b>PT-EXL-C</b> Exit and Emergency Lighting Combo	<b>S</b> (Square LED Lamp)	<b>SAL</b> (Salida)	White	Universal mounting (Ceiling, Wall, Side)