

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------

DESCRIPTION

Portor's LED Linear High Bay provides high performance efficient and quality light output. Perfect for high ceiling commercial application. Portor can also provide in-house installation solution for accessories such as for Motion Sensor or Emergency Battery Back-up. Saving additional labor cost and installation lead time.

Ideal use for commercial application such as large warehouse, parking/storage garage, gymnasium and retail stores with high ceiling.



CONSTRUCTION

Sleek slim design high bay with durable and solid form factor frame. Made out of quality aluminum alloy body with white finish.

ELECTRICAL

Luminaire is built with high efficacy LED package 120V-277V universal drivers (custom order available for 347-480V driver).

OPTICAL SYSTEM

High performance light output perfect for high ceiling. Optic lens designed to reduce glare and improve light distribution through precision lens optics.

ENERGY SAVINGS

Over 50% energy savings compare to fluorescent fixtures. Low heat production from LED technology will require overall less maintenance and operating cost.

DIMMING

Equipped with 1-10V continuous dimming.

MOUNTING

Comes standard with V-Hooks and chains, Option available for Pendant Mount.

CONTROLS

Option available for dimmers, occupancy sensors and daylight harvesting to maximize energy savings.

LISTING

UL Listed, RoHS

WARRANTY

5 Years Limited Warranty, Rated for 50,000 hours
(See Warranty documentation for details).

WATTAGE	DELIVERED LUMENS	EFFICACY
4' 170W	22,950 @ 4000K	135 lm/W
	23,263 @ 5000K	142 lm/W

TECHNICAL SPECIFICATION

CCT	4000K, 5000K
CRI	80+
DIMMABLE	0-10V dimming
BEAM ANGLE	120°
VOLTAGE	120V-277V
POWER FREQUENCY	50/60 Hz
POWER FACTOR	0.9673
THD	13.26%
WORKING TEMPERATURE	-4°F ~ 104°F
STORAGE TEMPERATURE	-22°F ~ 140°F
IP RATING	IP40, Suitable for damp locations
WARRANTY	5 year limited





ORDERING SAMPLE: - -

Series	Wattage	CCT
PT-HBL4 LED Linear High Bay Series	170W	40K (4000K) 50K (5000K)

Catalog Number:	Project Name:	Note:	Date:	Type:
-----------------	---------------	-------	-------	-------


DIMENSION

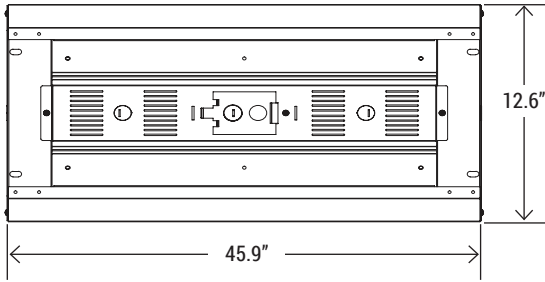

4' PT-HBL4-170W

SIDE PROFILE

WIRE GUARD OPTION

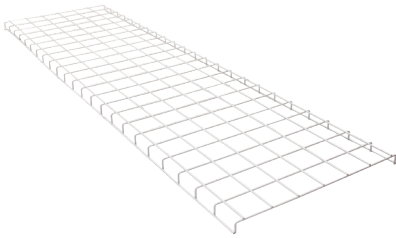

WG-HBL4-4FT
Wire guard for PT-HBL4-170W

MOUNTING OPTION



PM-HBL4
Pendant Mount